asy to Use Instructions

1. Lay hose out in sun to soften, for approximately 1 hour.

2. Determine desired hose layout.

   Cut hose as needed.

   Note: Make sure you have the needed connectors before cutting hose.

3. Attach connectors as needed based on the custom layout you created. Be sure to insert connectors at least 1/2 inch into hose to ensure a water tight seal.

   Note: Make sure all hose ends are sealed using a capped male connector.

4. Attach standard garden hose to outdoor faucet.

   Connect other end to the start of your soaker hose system.

   Note: Be sure not to remove the blue water restrictor in any of the female connectors used.

5. Cover hose lightly with mulch or soil.

   Turn faucet on just enough so entire hose is seeping but not spraying.

   Refer to: Soaker Hose Waterin Rates chart.

   Note: When possible, for best results, water supply should be at higher elevation.

Male and female connectors may be used to join smaller sections of soaker hose to form a longer run.

EZ-Connect™ System Pieces

- FE 2 - Feeders
- T 4 - T Connectors
- M 4 - Male Connectors
- F 4 - Female Connectors
- P 4 - Plugs

Gardening Option

Place along planting rows.

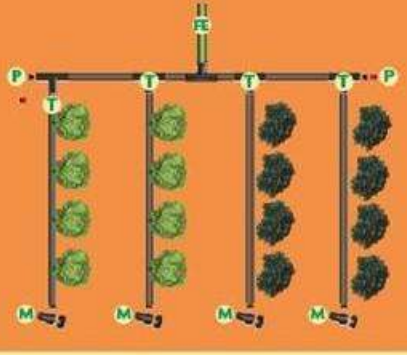

Landscaping Option

Curve soaker around landscaped flowers and plants.

Ring Option

Place around a tree or bush.